


# Simon Framevent Hi-Flow & Hi-Flow+

Manufactured in the highest quality U.V Stabilised PVCu, the Simon Framevent HF & HF + have been specifically designed to make it easy to achieve the requirements of Approved Document F 2021 whilst still maintaining the smooth, rounded aesthetic synonymous of the Framevent range.



## FEATURES


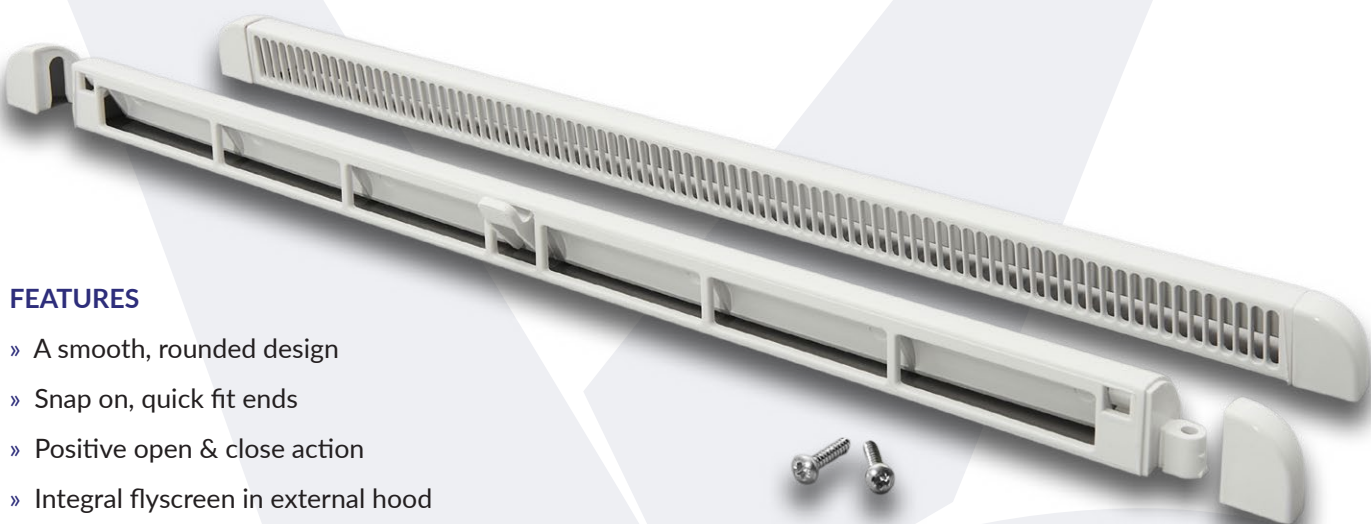












- » A smooth, rounded design
- » Snap on, quick fit ends
- » Positive open & close action
- » Integral flyscreen in external hood
- » Suitable for PVCu, timber & aluminium windows

## OPTIONS

- » Rod control available- for full compliance with Approved Document K 2013
- » Can be fitted to give updraught or down-draught
- » Dual colours & RAL colours available on request
- » Joiner pieces available

*Tested in accordance with BS EN 1026:2016 & BS EN 1027: 2016 Weather performance*

## AVAILABLE IN:

- |   |  |  |
|---|--|--|
|  Standard white (RAL 9910) |  Bright white (RAL 9016)      |  Cream (RAL 1015)            |
|  Tan (RAL 8003)            |  Mahogany Rosewood (RAL 8017) |  Black (RAL 9005)             |
|  Grey (RAL 7016)           |  Irish Oak (RAL 1011)         |  Chartwell Green (BS 14 C 35) |
|  Silver Grey (RAL 7001)    |  Slate Grey (RAL 7015)        |  Agate Grey (RAL 7038)        |
|  Black Brown (RAL 8022)    |  Ice Cream White (RAL 9001)   |  |

## R.W. Simon Limited

System Works, Hatchmoor Industrial Estate, Torrington, Devon EX38 7HP United Kingdom  
Tel: 01805 623721 Fax: 01805 624578 Email: [info@rwsimon.co.uk](mailto:info@rwsimon.co.uk) Web: [www.rwsimon.co.uk](http://www.rwsimon.co.uk)



# Simon Framevent HF - HF+

Model Details	
Framevent HF	Length - 415mm Equivalent area as per BS 13141-1:2019 - 4191mm <sup>2</sup> Box qty - 50 Slot Size - 365x13mm
Framevent HF+	Length - 525mm Equivalent area as per BS 13141-1:2019 - 5205mm <sup>2</sup> Box qty - 50 Slot Size - 2 x (230x13mm) + (10mm land)

## FIXING INSTRUCTIONS

- » Route out the Frame with the correct slot size & configuration for the model to be fitted
- » Place unit centrally over the slots
- » Fix unit in place by using screws provided
- » Screw hole centres are 20mm in from each end (40mm off the overall length)

## PERFORMANCE

- » Independently tested to BS EN 13141-1:2019
- » Water tightness of 400pa
- » Independently acoustically tested in accordance with BS EN 20140-10:2016, ISO 140-10:2010

## MAINTENANCE

- » The Framevent can be cleaned using a damp cloth. The external hood should be brushed lightly to remove dust from the flyscreen area.

*\*Airflow rates quoted are for when fitted in accordance with manufacturer's instructions. We recommend silicone sealing vents for best results\**

